

DE-SEIZE - CLEAN - LUBRICATE
ASSEMBLE - PROTECT

The indispensable products for your core activities

DE-SEIZE

800 REDUCE 4 Super powerful

Fast acting. Wetting, penetrating, rust removing, cleaning, water repellent, phosphating, lubricating. For very difficult dismantling operations without damaging the threads.

Properties: prevents rust, corrosion and wear.

4800A8	270 ml aerosol
4800A2	405 ml aerosol
4800A5	800 ml aerosol
2800i1	500 ml spray bottle
2800i1	1 l metal container
2800J1	5 l jerry can
2800U2	200 l drum

801 DEGRILUB Lubricant

An essential product for mechanical engineering. Frees, protects and lubricates. Excellent wettability enables rapid action on small mechanisms: bolts, screws, etc. Anti-seize lubricant: for locksmiths, the automotive industry, the industrial sector, etc. Temperature: min -30 to max +100°C

4801A4	650 ml aerosol
2801J1	5 l jerry can
2801U2	200 l drum



CLEAN

SOLVENTS

507 NDI Dry solvent

Indispensable for pre-mounting cleaning and prepainting preparation. Very rapid evaporation. Cleans metal and plastic surfaces (once a compatibility test has been carried out). Does not contain chlorinated solvent. Leaves a dry and clean surface.

4507A4	650 ml aerosol
2507J1	5 l jerry can

504 SDI NEW Industrial super degreaser

Extremely powerful degreaser: burnt grease, synthetic fluids, fuel, tar, rubber, varnish and deposits produced by hydrocarbons. Dries immediately. Prepares surfaces prior to glueing or painting.

4504A5	800 ml aerosol
2504J1	5 kg metal jerry can
2504O1	20 kg metal drum
2504O5	60 kg drum

503 KLEANER Dry solvent for plastics

Dry cleaner and grease remover quick drying. Cleaning of all devices and small mechanisms, contacts and printed circuits. Ideal to clean any difficult to reach and fragile surfaces. Highly concentrated grease dissolving ability. Does not contain chlorinated solvents. Does not damage fragile materials, labelling inks or plastics.

4503A4	650 ml aerosol
--------	----------------

508 A 90H Cleaner for electronic applications

Extremely safe live contact cleaner. Rapid and total evaporation. Cleans electrical cabinets, coils, printed circuit boards, precision electronic equipment (relays, connectors, etc.). Defluxing solvent. Does not stain. Does not lead to the oxidation of parts once it has dried. Has no effect on plastic.

4508A4	650 ml aerosol
--------	----------------

550 ORANGE SOLVENT Degreasing tar remover

Cleans and dissolves grease. Tar and combustion residue remover and descaler. Protects mechanical parts by leaving a light, greasy film. Non-irritant. Excellent to remove labels. All uses.

4550A4	650 ml aerosol
2550i2	1 l container
2550J1	5 l jerry can
2550O1	20 l drum
2550U2	200 l drum

515 ORANET B1 Super concentrated detergent

Very powerful liquid detergent. Cleans car bodies, tarps, painted surfaces, Cleans very encrusted floors, machine frames, etc. Can be used with a brush, in a roll-over vehicle wash system, automatic vehicle washer or in a high pressure cleaner. Dilute in water to 0.5 to 20%. Blue.

2515i1	500 ml spray bottle
2515J1	5 kg jerry can
2515O1	20 kg drum
2515O5	60 kg drum
2515U2	200 kg drum

DETERGENTS

DE-SEIZE
CLEAN

CLEAN

CLEANERS

501 NET'DEX Electrical contact cleaner

To be sprayed for cleaning and oxidation removal of electrical contacts. No risk for electrical devices. Excellent cleaner and degreaser for all electrical mechanisms (out of load). Let it dry after use.

4501A4	650 ml aerosol
2501U2	200 l drum

950 SOUFFLEUR Compressed air

Dust-removing aerosol with adjustable nozzle for printers, keyboards, optical readers, photos, videos, photocopiers, mechanical parts, etc. Mini compressed air duster that cleans without water. Dries all electro-mechanical equipment. Leaves parts perfectly dry after use. Pressure: 6 bars

4950A4	650 ml aerosol
--------	----------------

579 CODE 79 Drain unblocker

Destroys and eliminates all blockages consisting of fibres, fatty substances, hair, cotton wool, human and animal hairs, organic compounds, sponges, cigarette butts, etc. Used to unblock wastes from sinks, washbasins, toilets, etc. and suitable for plumbing, sanitation and maintenance purposes. The very high density (1.82) of this product provides an additional mechanical action on the blockage. No effect on septic tanks. For professional use. Do not use on white PVC. Dark

400021	1 l container
--------	---------------

STRIPPERS

5802 ORANGE CREME + Citrus

Orange extract hand soap (solvent-free) with pumice stone for in-depth cleaning. Softens the skin, contains plant-based surfactants, glycerin and talcum powder. Very effective for cleaning grease, oil, asphalt, ink, paint, and rust. Citrus scented

25802J1	5 l jerry can
25802KE	Box of 18 x 5 l jerry cans

6642 DECAPANT PRO Stripper for all surfaces

Very powerful industrial stripper specifically formulated for paint stripping in industrial and professional environments. Paint stripping from metal, wood and floors. Effective on recent and old oil-based, acrylic, epoxy, polyurethane, single- or two-pack paints. Does not contain CMR compounds. Consumption: 6-8 m² / l

26642I2	1 l container
26642J1	5 l metal jerry can
26642O1	20 l metal drum
26642U2	200 l drum



PROTECT

PAINT

699 GALVA EXPRESS Specifically for retouching

Hard-wearing treatment and long-lasting protection against corrosion (up to 3 years) for all metal parts: slideways, gates, re-welds, pipes, boiler-making, wire netting and tanks. Retouching of galvanised parts. Retouching of parts after hot galvanising. Can be used as a primer for the final coat. Grey Temperature: min -50 to max +200°C.

4699A4	650 ml aerosol
--------	----------------

706 NZA B Gloss galvanisation

Exceptional, long-lasting treatment and durable protection (up to 3 years) against corrosion for all metal parts. Coating rich in zinc leaving a slight shine. Effective even in corrosive or marine environments. Shiny grey Temperature: min -50 to max +200°C.

4706A4	650 ml aerosol
2706B7	1 kg tin
2706S1	5 kg bucket
2706U2	200 kg drum

DETECTION

952 LEAK DETECTOR Gas leaks

Suitable for the detection of gas leaks: compressed air, oxygen, butane, propane, CO₂ etc. on connectors or valves. Instantly detects leaks by foaming. The aerosol has an adjustable nozzle. Contains a corrosion inhibitor which prevents subsequent metal oxidation.

4952A4	650 ml aerosol
2952J1	5 kg jerry can
2952O5	60 kg drum

CLEAN
PROTECT

THREAD SEALING

For any threaded part that must be locked in place, secured in order to prevent loosening.
3 different grades available; choose depending on mechanical resistance desired.
Operating temperature: -60°C to +150°C (+230°C) – Setting time on steel: 10 to 25 min.

300 FREINAGE FORT

Strong resistance. For assemblies which normally need not be dismantled. Green liquid. Breaking strength on M10 steel bolts: >25 N.m.

1300F1	5 ml bottle
1300F9	24 ml bottle
1300F3	50 ml bottle
1300F5	250 ml bottle
6300F3 PMUC	50 ml bottle



303 FREINAGE MOYEN

For all pieces, which are to be dismantled when, required with standard tooling. Excellent resistance to vibration. Blue liquid. Breaking strength on M10 steel bolts: 10 - 20 N.m.

1303F1	5 ml bottle
1303F9	24 ml bottle
1303F3	50 ml bottle
1303F5	250 ml bottle
1303i2	1 l container



SILICONES

REPAIR

FIXING

125 ORABOND BLANC

Very high performance product

Bonds, assembles and seals everything. Newgeneration elastic putty sealant. Excellent adhesion to stainless steel, aluminium, wood, zinc, lacquer, stone, glass wool, chipboard, etc. Can be applied onto humid surfaces and surfaces completely immersed under water. Can be painted. Odourless. Does not drip. Ideal for replacing stainless steel/stainless steel welds. Very high tackiness. White Temperature: min -40 to max +150°C

1125C6	290 ml cartridge
--------	------------------

210 ORAMETAL A

Epoxy paste containing steel

Epoxy resin for gluing, repairing, refilling and filling in. For repairing pipes, crankcases, metal panels, motors etc. After polymerisation, ORAMETAL A can be filed, pierced, tapped and painted. Does no rust. Dark grey Machinable:
 16 hrs Temperature: min -35 to max +120°C


1210E1	28 g syringe
1210K2	500 g kit

310 FIXPRESS

Very strong and quick fastening

Very resistant to radial, axial and dynamic stresses. Helps extend machining tolerances recommended for clearance values of 0.15 to 0.25mm. Can be used as very strong, quick-setting sealant. Recommended for assemblies that cannot be dismantled. Green Temperature: min -60 to max +150°C

1310F3	50 ml bottle
1310F5	250 ml bottle
1310S1	5 kg container

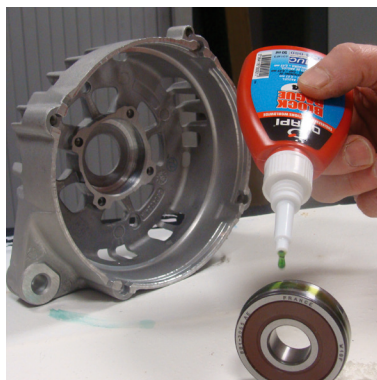

LUBRICATE

OILS

806 CB6

Clean lubricant for chains

Semi-synthetic water-resistant liquid. Anti-oxidising and anti-wear properties, for high temperatures. Does not stain or attract dust. Conveyors, forklift trucks, agricultural tooling, hobbies... Recommended by SEDIS. Temperature: min -30 to max+280°C.

4806A4	650 ml aerosol
3806i2	1 l container
3806J1	5 l jerry can
3806O1	20 l drum
3806U2	200 l drum

859 FILDUC 1879

Tapping, drilling, sawing

Cutting oil with very good extreme pressure and anti-wear properties. Effective, multi-purpose product. Exceptional adhesion on screw taps and drills. Excellent for tapping difficult holes whether "blocked" or not in all types of steel, including stainless. Brown

4859A4	650 ml aerosol
2859R1	125 ml oil can
2859J1	5 l jerry can
2859U2	200 l drum



GREASES

616 CT 830

High-performance grease

Synthetic fluorinated grease, resistant to hydrocarbons and chlorates. Remains very stable over time. Recommended for difficult greasing jobs: refineries, chemical plants etc. Suitable for the lubrication of conveyors in epoxy painting booths. White Operating temperature: -40 to +280°C

3616T3	100 g tube
3616C5	800 g cartridge
3616B7	1 kg tin
3616S1	5 kg tub

605 WSA

Marine grease

Adheres, resists to water and steam. Multipurpose. Suitable for the marine environment and hydraulic industries. Bearings, axles, runners etc. Port areas, water treatment plants. Green Operating temperature: -30 to +130°C

4605A4	650 ml aerosol
3605T4	200 g tube
3605C4	400 g cartridge
3605B7	1 kg tin
3605S1	5 kg tub
3605O2	25 kg drum
3605O4	50 kg drum

VARNISHES

704 VERGRAF

Graphite-based dry varnish

Dry graphite-based varnish designed to reduce the friction coefficient on all types of surface. Dries at room temperature. For pre-treatment of surfaces and pieces submitted to high temperatures in dusty atmosphere. Lubrication of runners, cylinder rods, hinges, foundry moulds, glass etc. Particularly suitable for combating fretting wear. Black Operating temperature: -70 to +900°C

4704A4	650 ml aerosol
--------	----------------



The indispensable products for your core activities...

Understanding your problems, anticipating your needs
and complying with the standards of your business...
ORAPI is committed to you in offering high-quality products.

ORAPI designs, manufactures and sells all consumables
required for the upkeep, industrial maintenance and construction of machines.

In response to all your problems,
explore our range of highly technological products that are reliable and tested
to ensure perfect manufacture or maintenance of your machines.



Manufacturing site and registered office

Parc Industriel de la Plaine de l'Ain - 225, allée des Cèdres
01150 Saint-Vulbas - FRANCE
Tel. +33 (0)4 74 40 20 25 - Fax +33 (0)4 74 40 20 26
contact@orapi.com
www.orapi-maintenance.com

*De-seize, clean, lubricate, assemble and protect with ORAPI,
the maintenance and process expert for the past 45 years.*